

LUX H11

48V



KUBOTA Z482 | 2 CYL | 1500 RPM
LIQUID COOLED ENGINE



HYDRAULIC TELESCOPIC MAST
MAX HEIGHT | 9 m
LIFETIME WARRANTY



RATED OUTPUT | 3.5kVA - 230V
OUTLET SOCKET | 1kVA - 230V



FUEL CONSUMPTION | 0.55 l/h



LED FLOODLIGHTS | 4X300 W
ILLUMINATED AREA | 4500 m²
GUARANTEED FOR 50.000 HRS



340° | MAST ROTATION
ADJUSTABLE FLOODLIGHT



GALVANIZED METAL BODY
80 µm POWDER COATING

LH SERIES



MADE IN
ITALY



LUXTOWER 
lighting towers

LH Series

LUX H11

TECHNICAL DATA

Dimensions & weight

Dimensions min.	mm	2510 X 1460 X 2500
Dimensions max.	mm	2510 X 1630 X 9000
Total weight without fuel	Kg	Fixed tow trailer 870
	Kg	Foldable tow trailer 901

Features

Rotation		340°
Floodlight	W	4 X 300 W
Lamps		LED
Wind stability	Km/h	80
Optional	AMOSS KIT - mast automatic lowering system	
		Foldable tow trailer Main generator switch


Alternator

Model	Synchronous Linz Alumen	
Frequency	Hz	50
Degree of protection	IP	23
Rated output	kVA/V	3.5 - 230
Outlet socket	kVA	1

Engine

Model	Kubota Z482 2 cyl. liquid cooled	
Fuel	Diesel	
r.p.m.	1500	
Noise Level	db at 7 meters	65
Tank capacity	l	80
Running time	h	145
Fuel consumption	l/h	0.55

Illuminated Area // 5 lux min

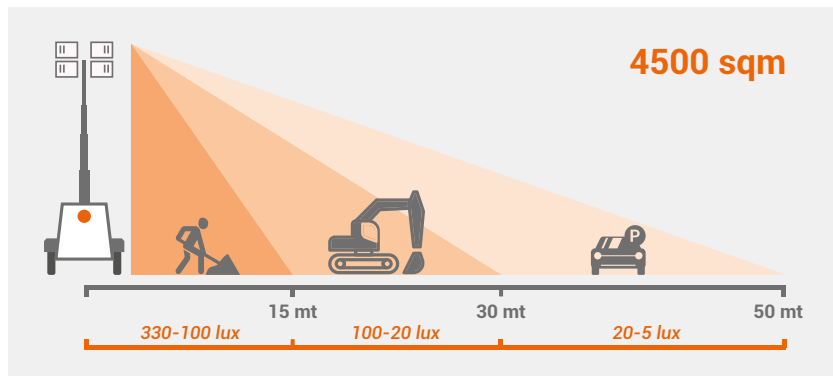

ECC HOMOLOGATED TOW TRAILER

- fixed tow trailer •
- foldable tow trailer •



DSE DIGITAL CONTROL

DSE Tracking as optional



LIGHT SENSOR AS STANDARD



BUNDED TANK

liquid collection tank



HEAVY DUTY LED FLOODLIGHTS

IP67 DEGREE OF PROTECTION

Load Delivery



Truck | Assembled 9 Units
Disassembled 18 Units



Luxtower: Via Strada Nuova, 28 - 27050 Codevilla (PV) ITALY | TLF. +39 0383 365544 | Fax +39 0383 49702

LUXTOWER ongoing policy is in continuous improvement. The company reserves the right to modify the technical specifications and items described in this catalogue at any time and without notice for technical or commercial reasons. Product images are shown for information only. LUXTOWER® - 2016© All rights reserved.